
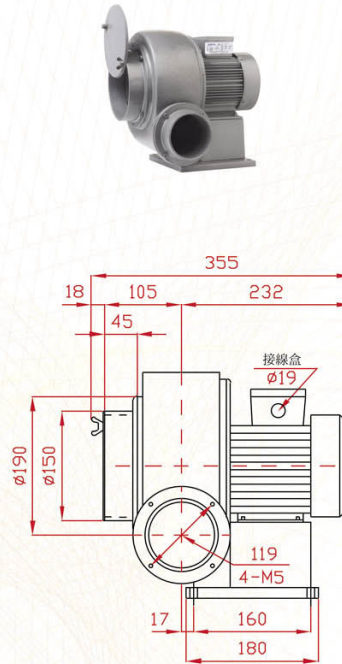
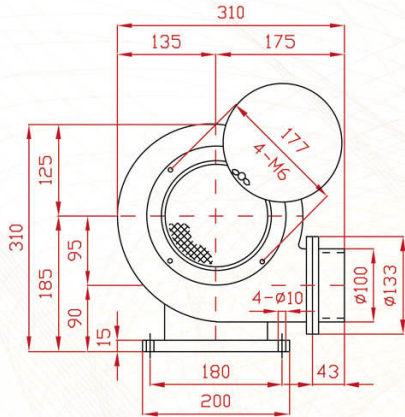


# BSA SERIES




BLOTEK®

BLOTEK HIGH PERFORMANCE BLOWER

BSA-0200

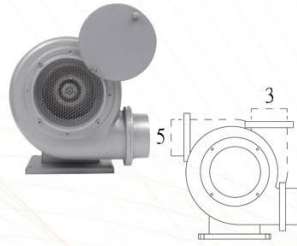

BSA-0200L

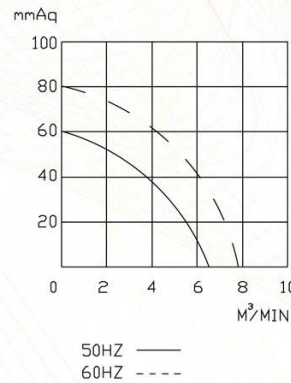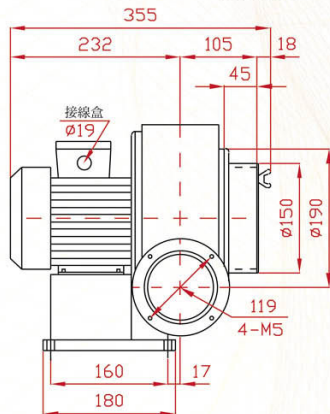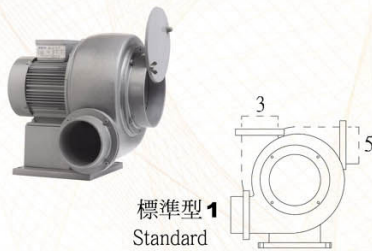

## SPECIFICATIONS

型號 TYPE	功率 KW	出口口徑 MM	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M³/MIN	噪音值 dB(A)	淨重 KG(N.W.)
BSA-0200	0.2	φ 100	請指定電壓，註一 (Note 1)	50	2800	60	6.5	65	11.2
BSA-0200L				60	3300	80	7.8	70	

說明 Instruction : L Type : 反向(Opposite direction)

註一：供應電壓如下：單相(1 Phase)—100, 110, 120, 200, 220, 230, 240V

(Note 1) 三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V

PS : 訂購時請指定電壓與頻率。When ordering, please specify voltage and frequency.

BLOTEK® 送排風機 <http://www.blotek.com.tw>