

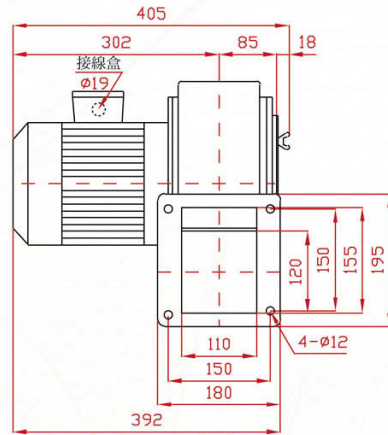
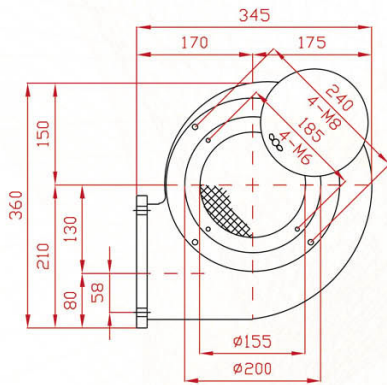


BSF SERIES

BSF-0750

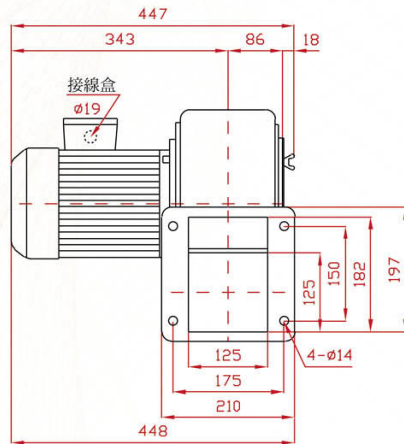

BSF-1500

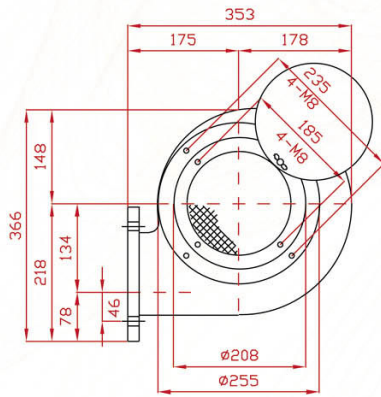




SPECIFICATIONS

型號 TYPE	功率 KW	出口口徑 MM	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M ³ /MIN	噪音值 dB(A)	淨重 KG(N.W.)
BSF-0750	0.75	110 x 120	請指定電壓，註一 (Note 1)	50	2800	120	17	68	20
BSF-0750L				60	3300	190	20	72	
BSF-0750H									
BSF-1500	1.5	125 x 125	請指定電壓，註二 (Note 2)	50	2800	95	25		31
BSF-1500L				60	3300	115	30		
BSF-1500H									

BSF-0750L






BSF-0750H

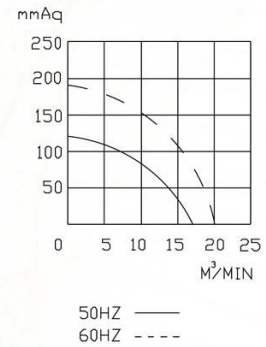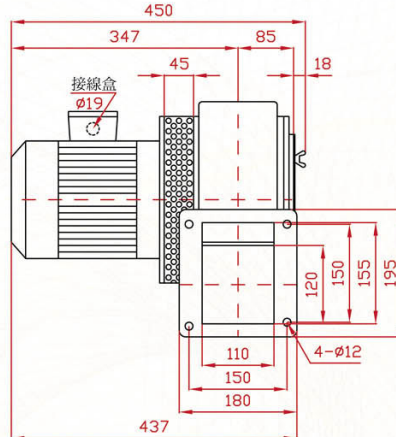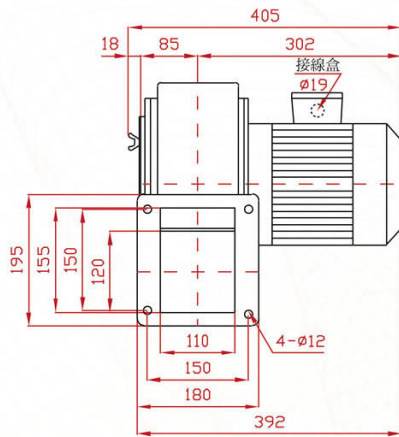

BSF-1500L



BSF-1500H

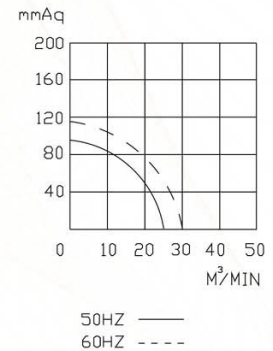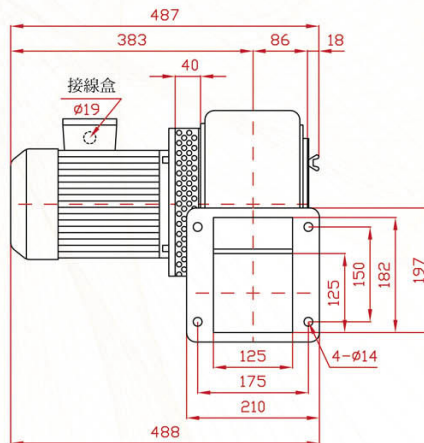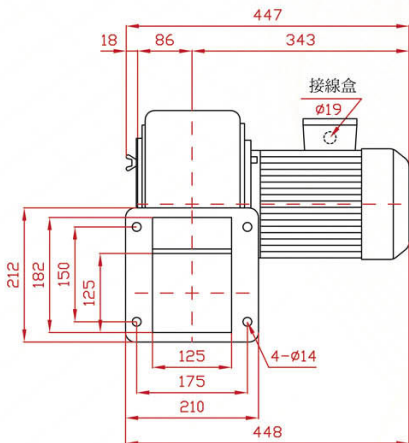

註一：供應電壓如下：單相(1 Phase)—100, 110, 120, 200, 220, 230, 240V
(Note 1) 三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V

註二：供應電壓如下：三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V
(Note 2)

PS：訂購時請指定電壓與頻率。
When ordering, please specify voltage and frequency.