


BSA SERIES



BLOTEK®

BLOTEK HIGH PERFORMANCE BLOWER


BSA-0200





標準型
Standard

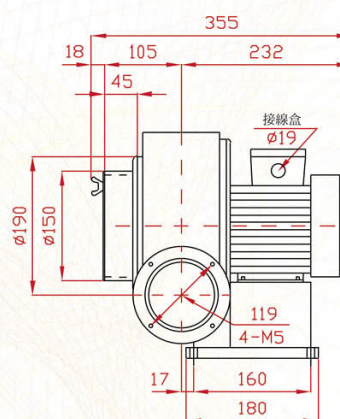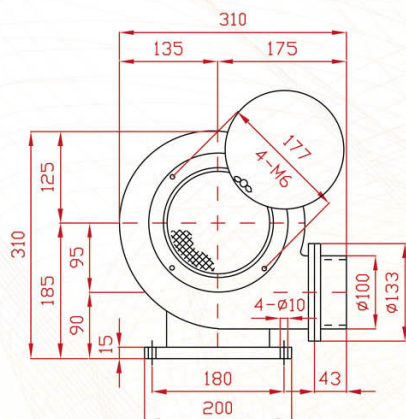

BSA-0200L

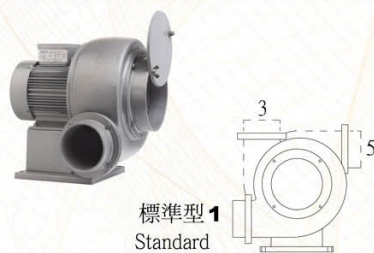

標準型
Standard

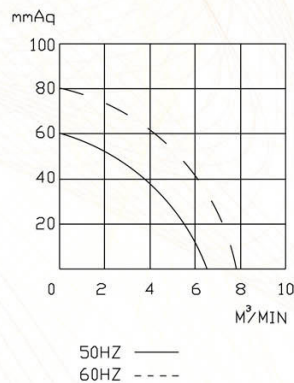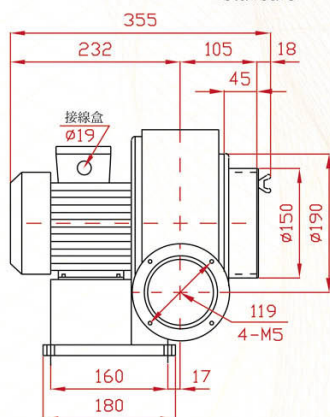

SPECIFICATIONS

型號 TYPE	功率 KW	出口口徑 MM	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M^3/MIN	噪音值 dB(A)	淨重 KG(N.W.)
BSA-0200	0.2	$\phi 100$	請指定電壓，註一 (Note 1)	50	2800	60	6.5	65	11.2
BSA-0200L				60	3300	80	7.8	70	

說明 Instruction : L Type : 反向(Opposite direction)

註一：供應電壓如下：單相(1 Phase)—100, 110, 120, 200, 220, 230, 240V

(Note 1) 三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V



PS：訂購時請指定電壓與頻率。When ordering, please specify voltage and frequency.

BLOTEK® 送排風機



<http://www.blotek.com.tw>

BSA SERIES

BSA-0400

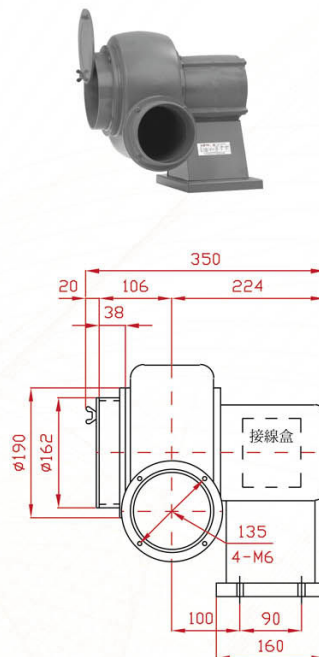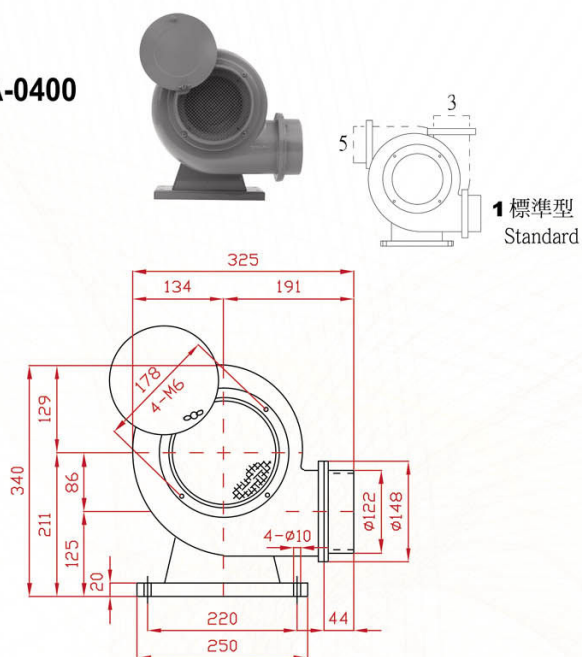

BSAS-0400

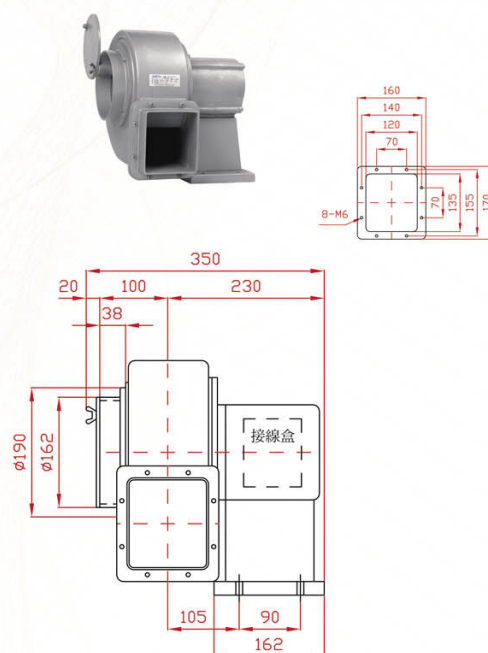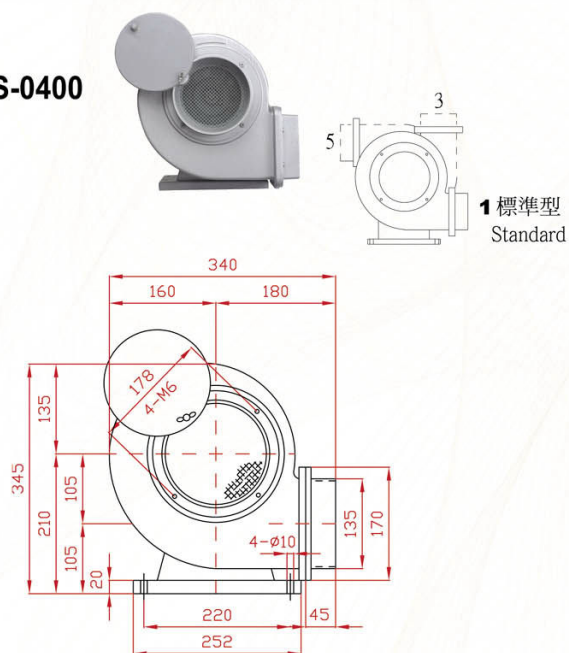

SPECIFICATIONS




型號 TYPE	功率 KW	出口口徑 MM	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M ³ /MIN	噪音值 dB(A)	淨重 KG(N.W.)
BSA-0400	0.4	φ 122	請指定電壓，註一 (Note 1)	50	2800	65	15	65	17
BSA-0400L				60	3300	85	18	70	
BSAS-0400	0.4	120x135	請指定電壓，註一 (Note 1)	50	2800	65	15	65	17
				60	3300	85	18	70	

說明 Instruction : L Type : 反向(Opposite direction)


BSA-0400L



標準型 1
Standard

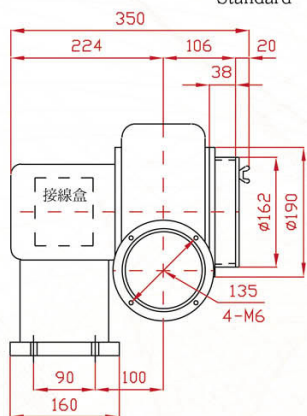

50HZ —
60HZ - - -



50HZ —
60HZ - - -

註一：供應電壓如下：單相(1 Phase)—100, 110, 120, 200, 220, 230, 240V
 (Note 1) 三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V

PS：訂購時請指定電壓與頻率。
 When ordering, please specify voltage and frequency.