

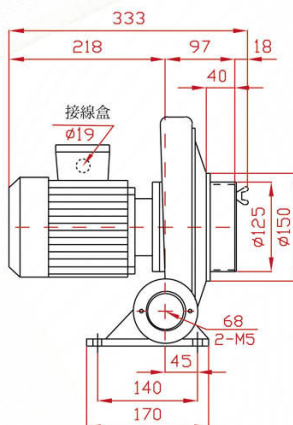


BTK SERIES



BTK-0200

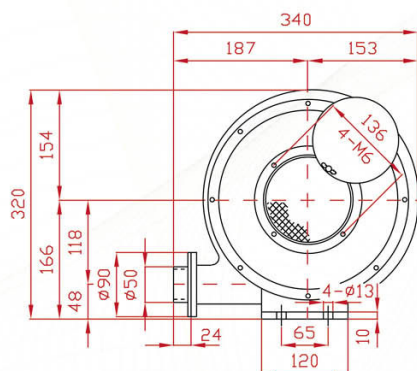


BTK-0200H

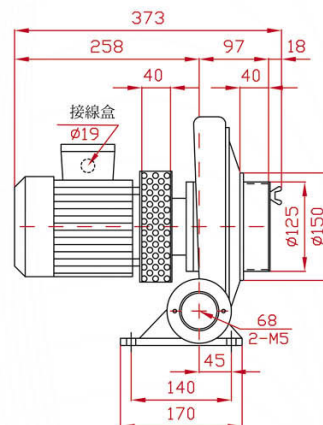

BTK-0400

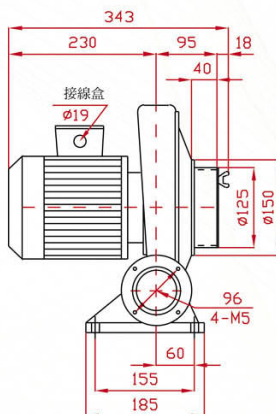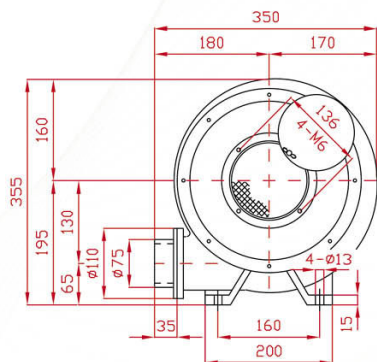

BTK-0400H



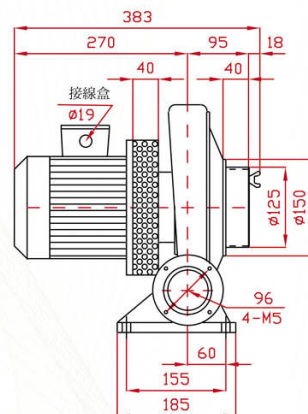


SPECIFICATIONS




型號 TYPE	功率 KW	出口口徑 MM	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M ³ /MIN	噪音值 dB(A)	淨重 KG(N.W.)
BTK-0200	0.2	φ 50	請指定電壓，註一 (Note 1)	50	2800	100	2.5	60	10
BTK-0200H				60	3300	120	3.5	65	11
BTK-0200C									13.5
BTK-0400	0.4	φ 75	請指定電壓，註一 (Note 1)	50	2800	130	6	55	17.5
BTK-0400H				60	3300	150	8	70	18.5
BTK-0400C									21

說明 Instruction : **H** Type : 防水隔熱型(Waterproof and heat insulation)、**C** Type : 微調入口風門(Micro adjust inlet valve)

BTK-0200C

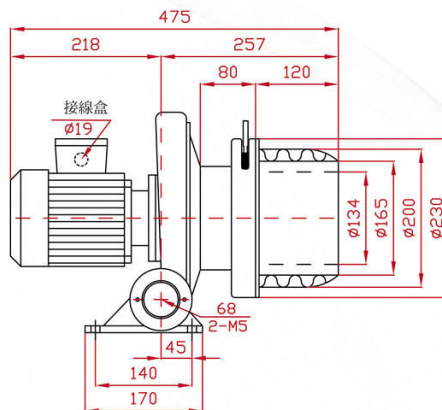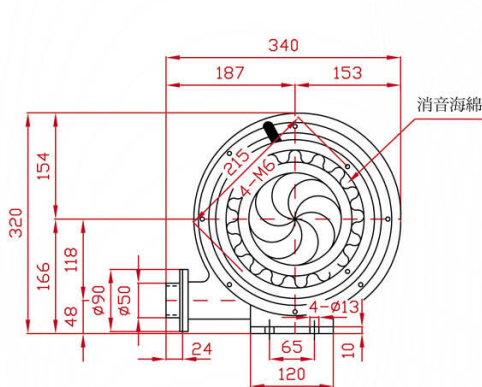

BTK-0400C

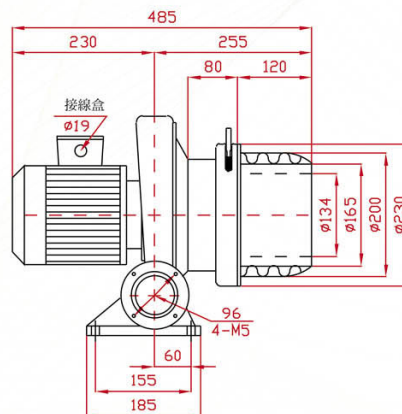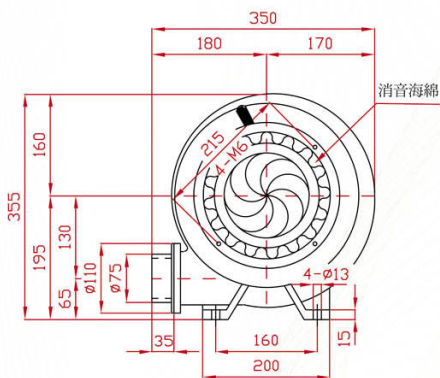


註一：供應電壓如下：單相(1 Phase)—100, 110, 120, 200, 220, 230, 240V
(Note 1) 三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V



PS：訂購時請指定電壓與頻率。
When ordering, please specify voltage and frequency.

BTK SERIES


BTK-0750

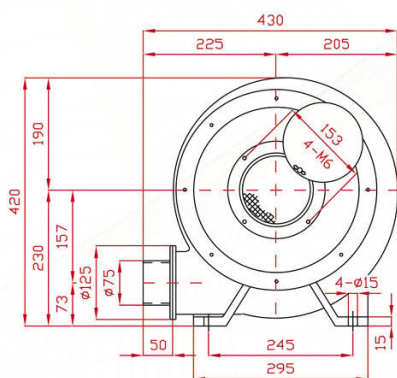



BTK-0750H

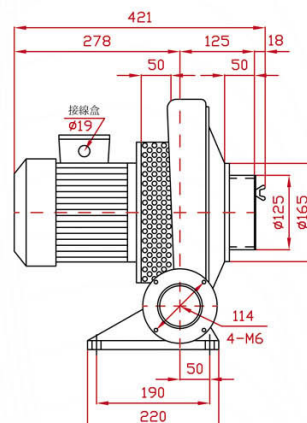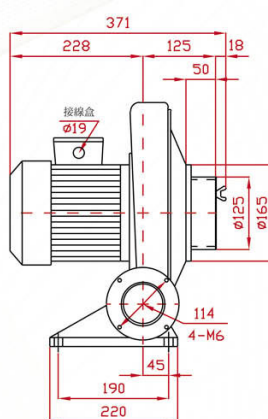

BTK-1500

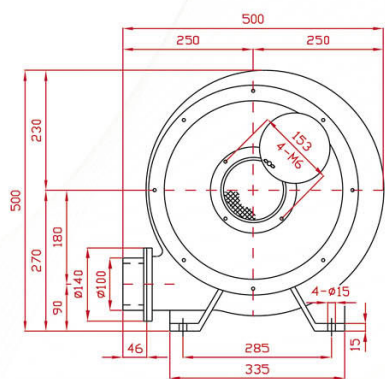

BTK-1500H


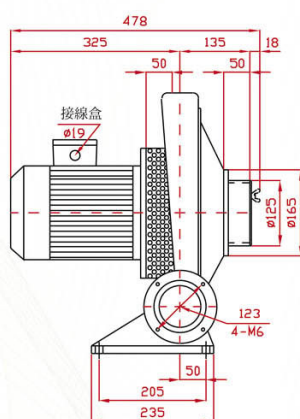
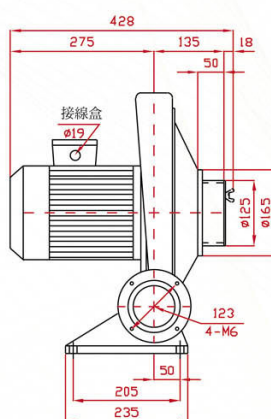


SPECIFICATIONS




型號 TYPE	功率 KW	出口口徑 MM	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M ³ /MIN	噪音值 dB(A)	淨重 KG(N.W.)
BTK-0750	0.75	φ 75	請指定電壓，註一 (Note 1)	50	2800	210	13	63	24.5
BTK-0750H				60	3300	230	15	79	25.5
BTK-0750C									28
BTK-1500	1.5	φ 100	請指定電壓，註二 (Note 2)	50	2800	230	13	70	35
BTK-1500H				60	3300	250	18	88	36
BTK-1500C									38.5

說明 Instruction : **H** Type : 防水隔熱型(Waterproof and heat insulation)、**C** Type : 微調入口風門(Micro adjust inlet valve)

BTK-0750C

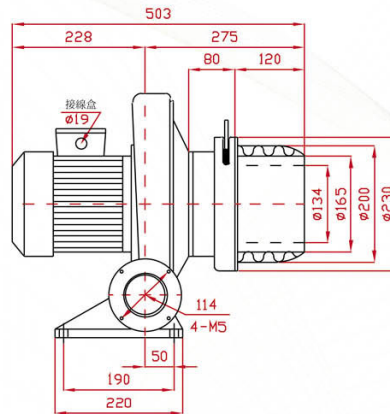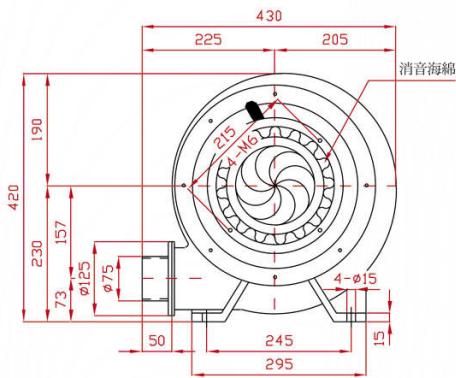

BTK-1500C

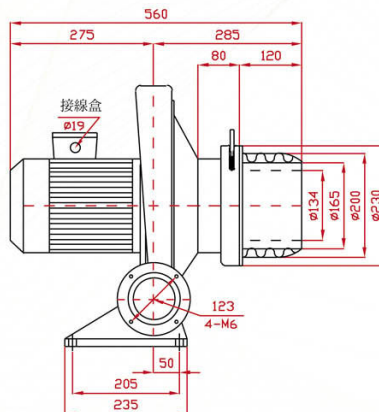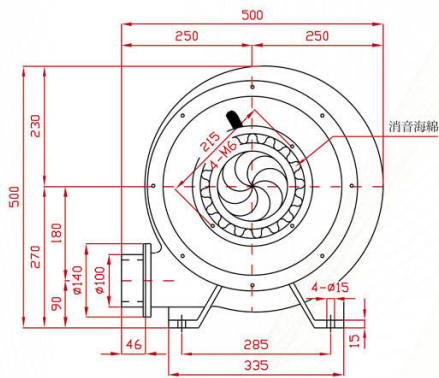

註一：供應電壓如下：單相(1 Phase)—100, 110, 120, 200, 220, 230, 240V
(Note 1) 三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V


註二：供應電壓如下：三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V
(Note 2)

PS：訂購時請指定電壓與頻率。



When ordering, please specify voltage and frequency.

BTK SERIES


BTK-2200

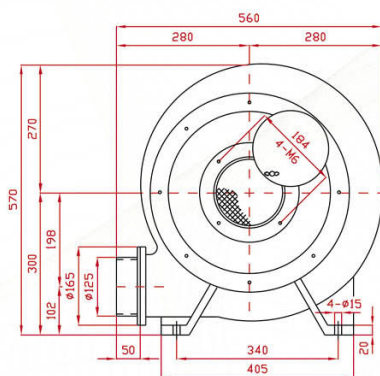



BTK-2200H

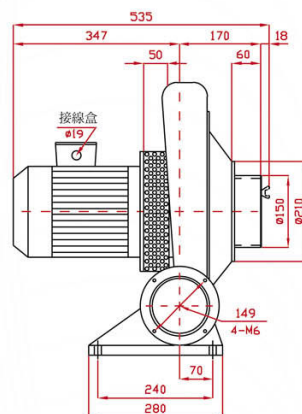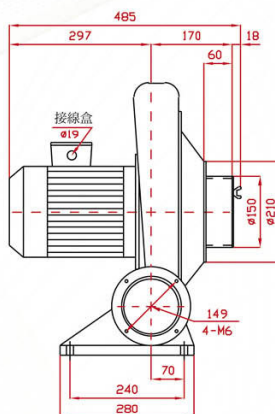

BTK-3700

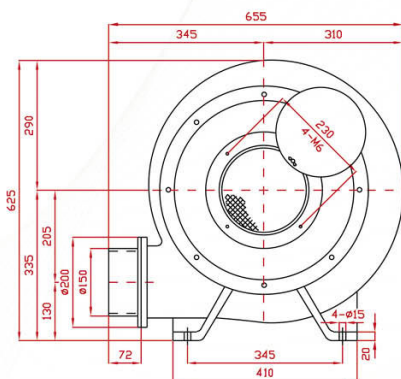

BTK-3700H


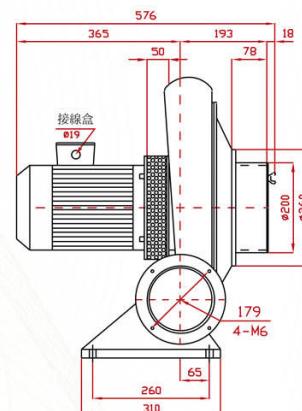
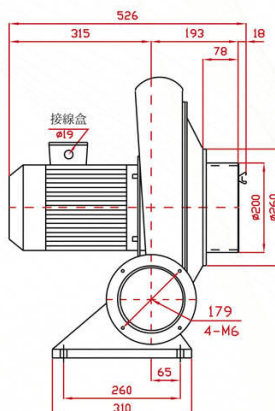


SPECIFICATIONS




型號 TYPE	功率 KW	出口口徑 MM	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M ³ /MIN	噪音值 dB(A)	淨重 KG(N.W.)
BTK-2200	2.2	φ 125	請指定電壓，註二 (Note 2)	50	2800	300	23	75	48
BTK-2200H				60	3300	340	27	90	49
BTK-2200C									52.5
BTK-3700	3.7	φ 150	請指定電壓，註二 (Note 2)	50	2800	330	33	78	58.5
BTK-3700H				60	3300	380	38	95	60
BTK-3700C									63

說明 Instruction : **H** Type : 防水隔熱型(Waterproof and heat insulation)、**C** Type : 微調入口風門(Micro adjust inlet valve)

BTK-2200C

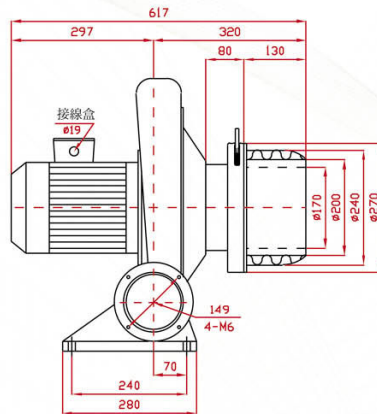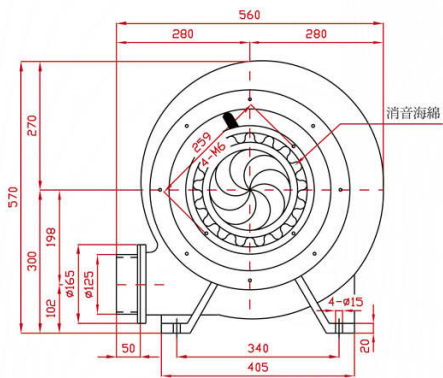

BTK-3700C

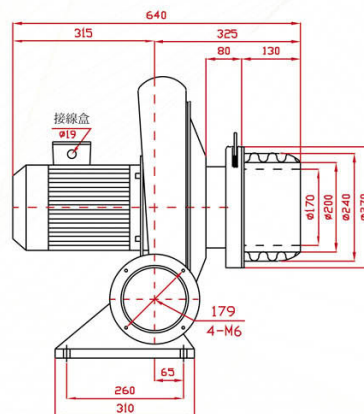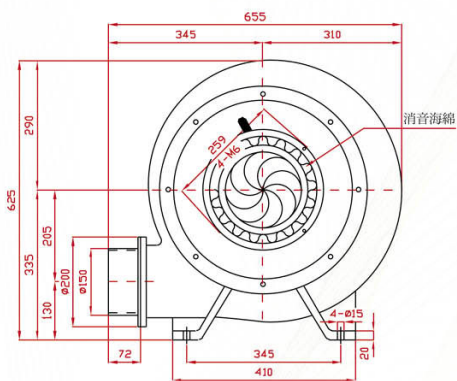


註二：供應電壓如下：三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V
(Note 2)

PS：訂購時請指定電壓與頻率。



When ordering, please specify voltage and frequency.

BTK SERIES


BTK-5500

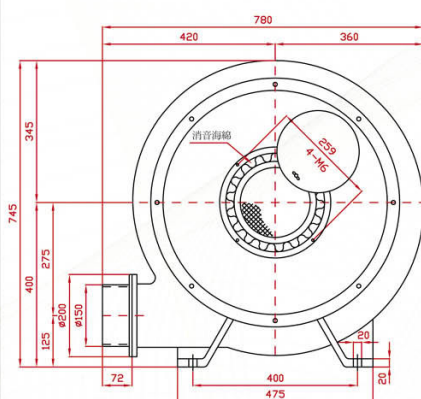



BTK-5500H

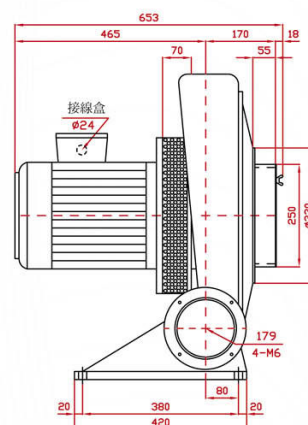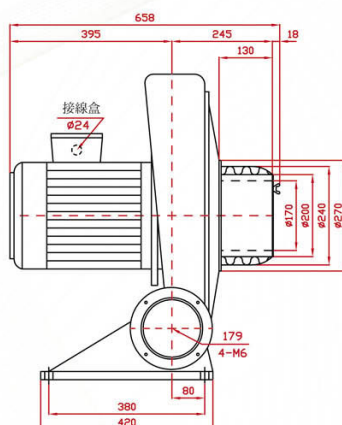

BTK-7500

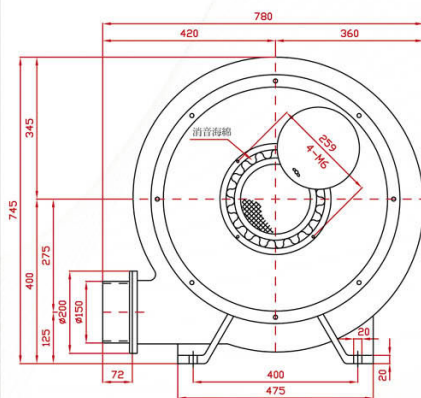

BTK-7500H


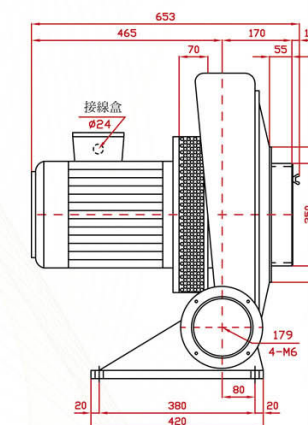
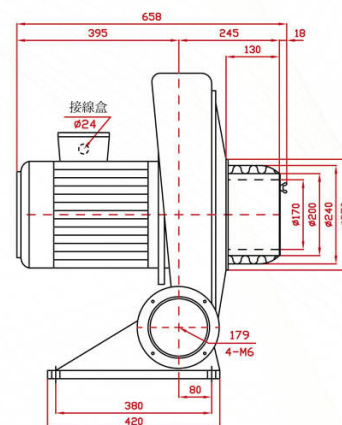


SPECIFICATIONS




型號 TYPE	功率 KW	出口口徑 MM	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M ³ /MIN	噪音值 dB(A)	淨重 KG(N.W.)
BTK-5500	5.5	φ 150	請指定電壓，註二 (Note 2)	50	2800	440	46	82	89
BTK-5500H				60	3300	550	60	98	90.5
BTK-5500C									93.5
BTK-7500	7.5	φ 150	請指定電壓，註二 (Note 2)	50	2800	500	50	90	102
BTK-7500H				60	3300	620	62	105	103.5
BTK-7500C									106.5

說明 Instruction : **H** Type : 防水隔熱型(Waterproof and heat insulation)、**C** Type : 微調入口風門(Micro adjust inlet valve)

BTK-5500C

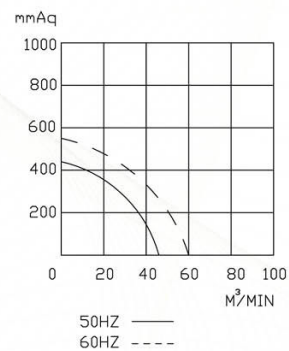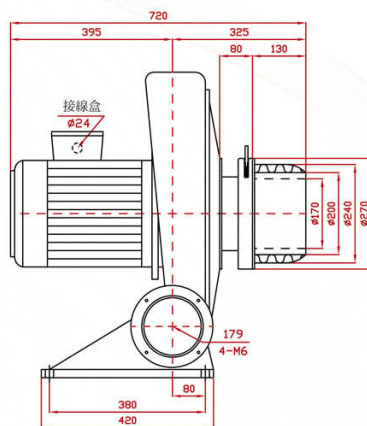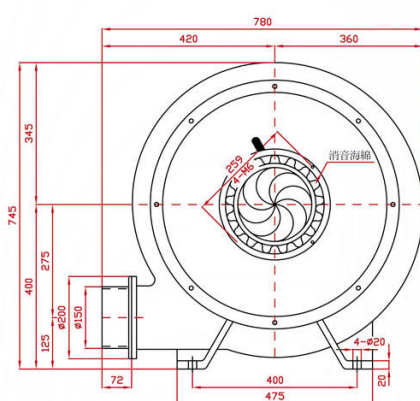

BTK-7500C

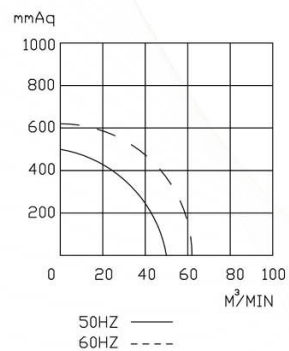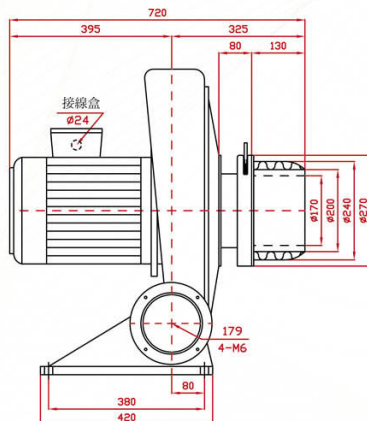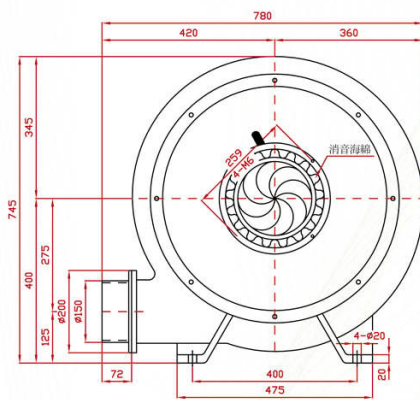

註二：供應電壓如下：三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V
(Note 2)

PS：訂購時請指定電壓與頻率。

When ordering, please specify voltage and frequency.