

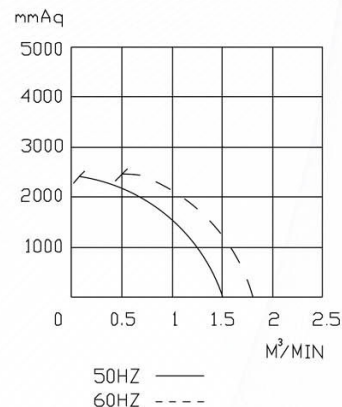
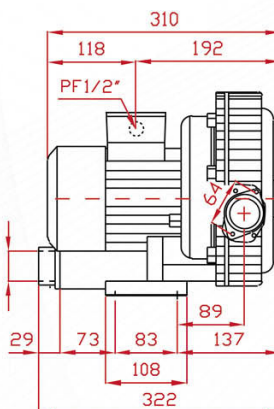
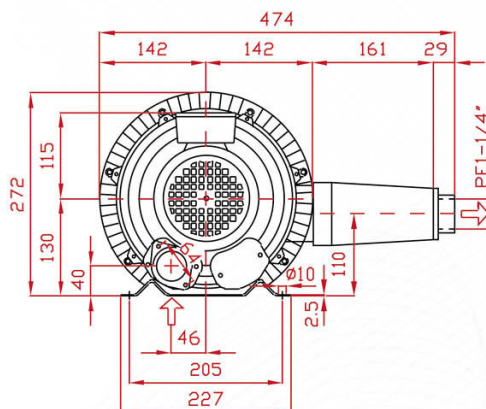
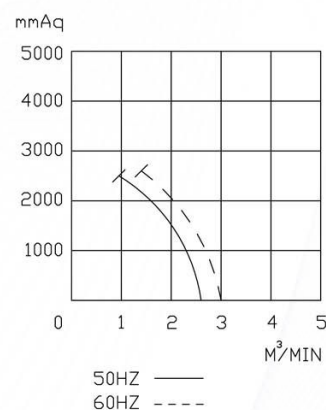


# BVH SERIES

**BVH-0750**

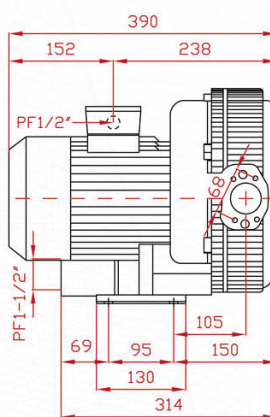

**BVH-1500**

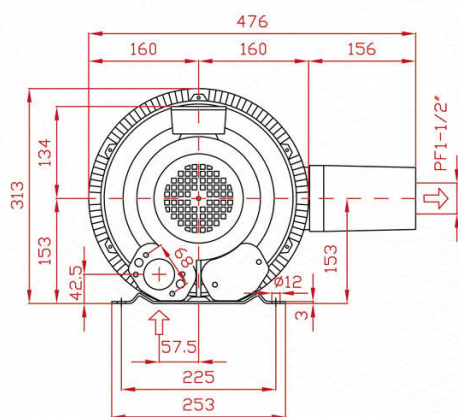

## SPECIFICATIONS

型號 TYPE	功率 KW	口徑 INCH	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M³/MIN	噪音值 dB(A)	淨重 KG(N.W.)	釋壓閥 Relief Valve	過濾器 Filter
BVH-0750	0.75/0.85	PF1-1/4"	請指定電壓，註一 (Note 1)	50 60	2800 3300	2400 2450	1.5 1.8	60 66	17	BRV-1	MF10
BVH-1500	1.5/1.75	PF1-1/2"	請指定電壓，註四 (Note 4)	50 60	2800 3300	2500 2600	2.6 3.0	66 69	28.5	BRV-1	MF12 / FS12

註一：供應電壓如下：單相(1 Phase)—100, 110, 120, 200, 220, 230, 240V

(Note 1) 三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V

註四：供應電壓如下：單相(1 Phase)—200, 220, 230, 240V




(Note 4)

PS：1. 訂購時請指定電壓與頻率。When ordering, please specify voltage and frequency.




2. 釋壓閥與過濾器為選購品，請參閱第86~87頁資料。The relief valve and filter are the option goods, please see page 86~87 data.

BLOTEK 送排風機 <http://www.blotek.com.tw>

**BVH-1900**

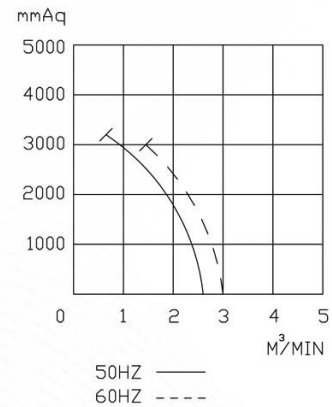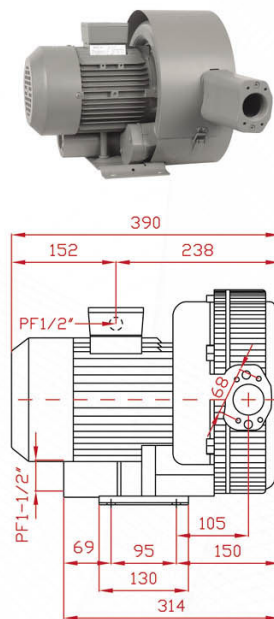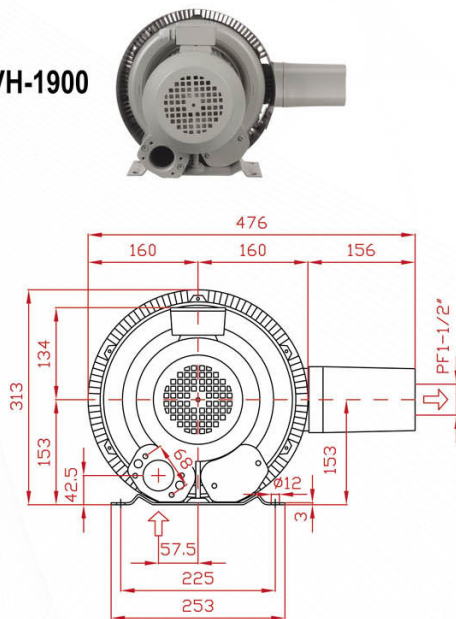

**BVH-2600**

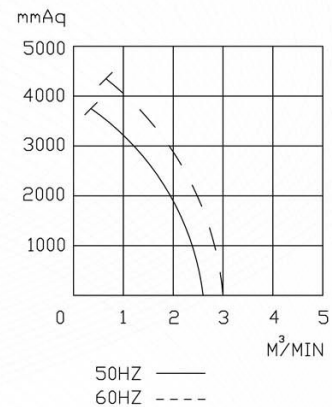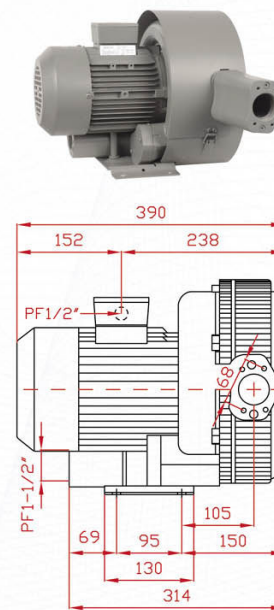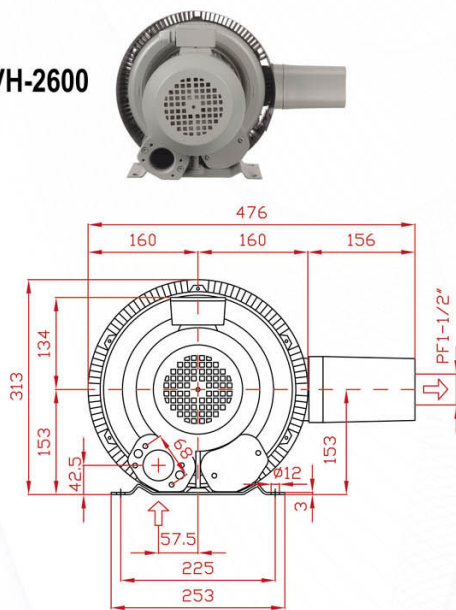

## SPECIFICATIONS

型號 TYPE	功率 KW	口徑 INCH	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M³/MIN	噪音值 dB(A)	淨重 KG(N.W.)	釋壓閥 Relief Valve	過濾器 Filter
BVH-1900	1.75/1.9	PF1-1/2"	請指定電壓，註二 (Note 2)	50	2800	3200	2.6	66	25	BRV-2	MF12 / FS12
				60	3300	3000	3.0	69			
BVH-2600	2.2/2.6	PF1-1/2"	請指定電壓，註二 (Note 2)	50	2800	3750	2.6	66	28	BRV-2	MF12 / FS12
				60	3300	4350	3.0	69			

註二：供應電壓如下：三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V  
(Note 2)




PS：1. 訂購時請指定電壓與頻率。When ordering, please specify voltage and frequency.

2. 釋壓閥與過濾器為選購品，請參閱第86~87頁資料。The relief valve and filter are the option goods, please see page 86~87 data.






# BVH SERIES

**BVH-3700**

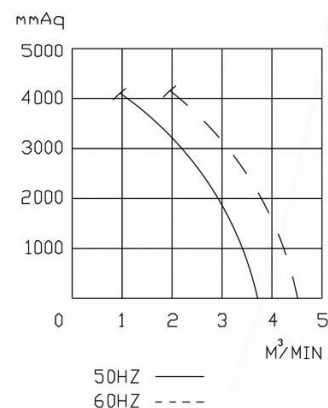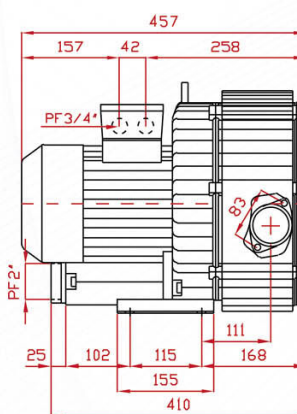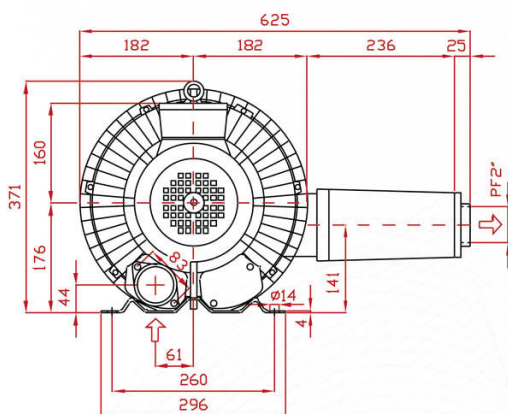

**BVH-4600H**

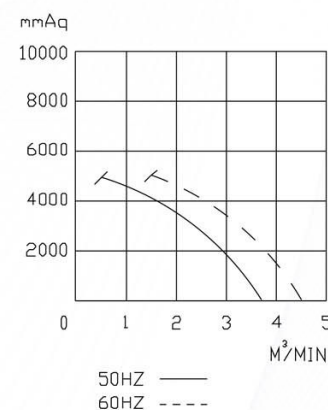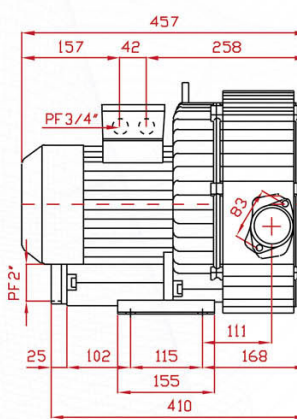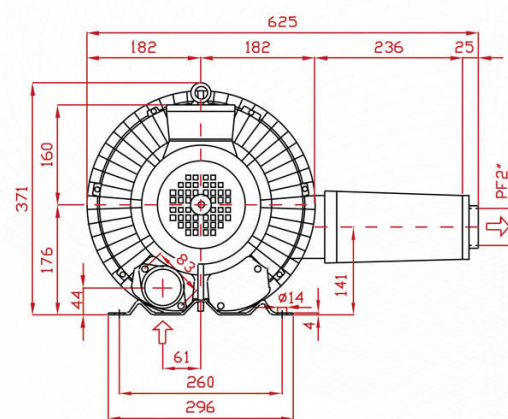

## SPECIFICATIONS




型號 TYPE	功率 KW	口徑 INCH	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M³/MIN	噪音值 dB(A)	淨重 KG(N.W.)	釋壓閥 Relief Valve	過濾器 Filter
BVH-3700	3.4/3.7	PF 2"	請指定電壓，註二 (Note 2)	50	2800	4100	3.7	74	40	BRV-2	MF16 / FS16
				60	3300	4150	4.5	77			
BVH-4600H	4.0/4.6	PF 2"	請指定電壓，註二 (Note 2)	50	2800	4950	3.7	74	43	BRV-2	MF16 / FS16
				60	3300	5000	4.5	77			

註二：供應電壓如下：三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V (Note 2)




PS：1. 訂購時請指定電壓與頻率。When ordering, please specify voltage and frequency.

2. 釋壓閥與過濾器為選購品，請參閱第86~87頁資料。The relief valve and filter are the option goods, please see page 86~87 data.

**BVH-4600**

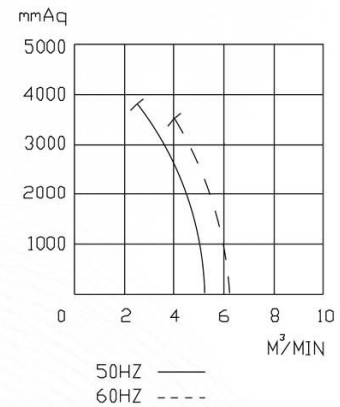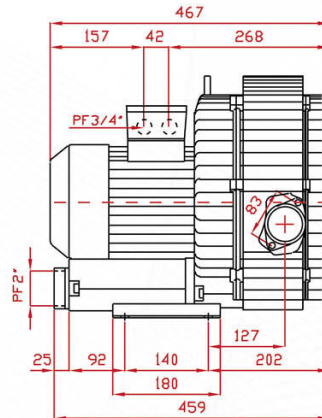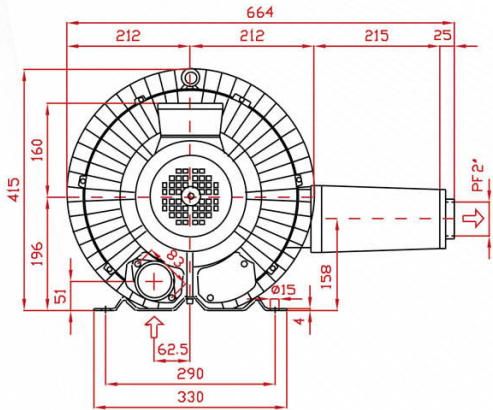

**BVH-5500**

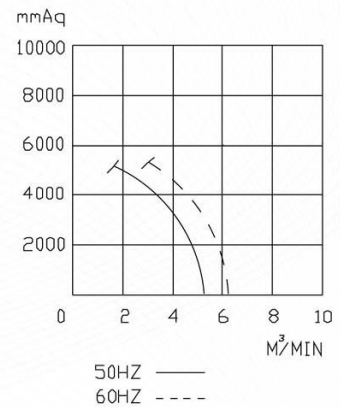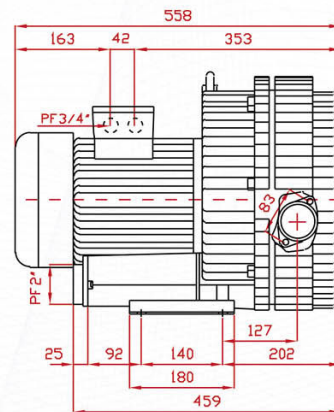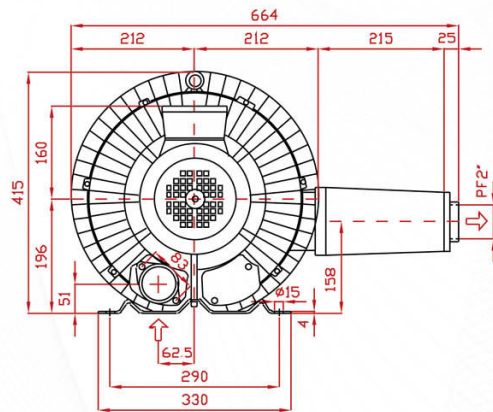

## SPECIFICATIONS







型號 TYPE	功率 KW	口徑 INCH	電壓 V	頻率 HZ	回轉數 R.P.M.	靜壓 mmAq	最大風量 M³/MIN	噪音值 dB(A)	淨重 KG(N.W.)	釋壓閥 Relief Valve	過濾器 Filter
BVH-4600	4.0/4.6	PF 2"	請指定電壓，註二 (Note 2)	50	2800	3800	5.2	75	55	BRV-2	MF16 / FS16
				60	3300	3500	6.2	79			
BVH-5500	5.5/6.3	PF 2"	請指定電壓，註二 (Note 2)	50	2800	5150	5.2	75	72	BRV-2	MF16 / FS16
				60	3300	5300	6.2	79			

註二：供應電壓如下：三相(3 Phase)—200, 208, 220, 230, 240, 346, 380, 400, 415, 440, 480, 575V  
(Note 2)

PS：1. 訂購時請指定電壓與頻率。When ordering, please specify voltage and frequency.

2. 釋壓閥與過濾器為選購品，請參閱第86~87頁資料。The relief valve and filter are the option goods, please see page 86~87 data.









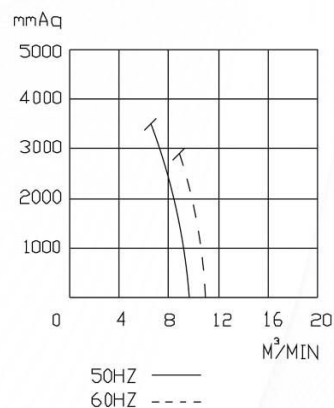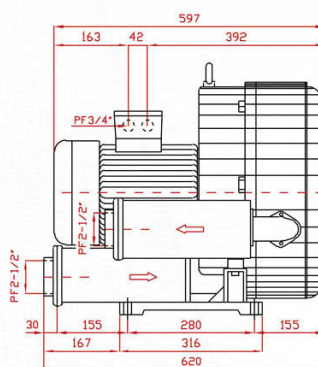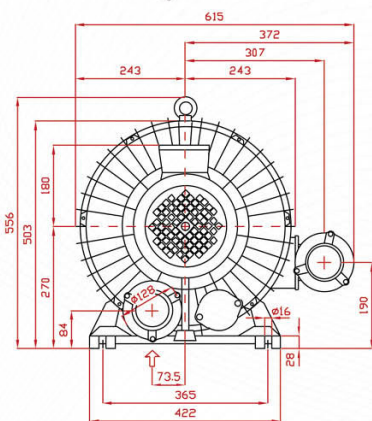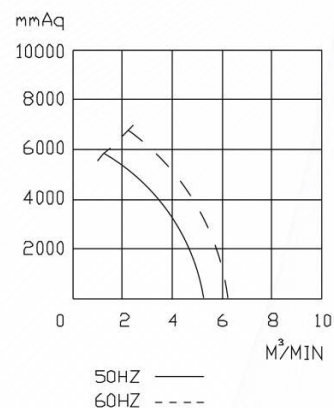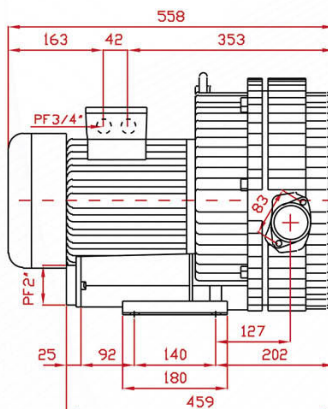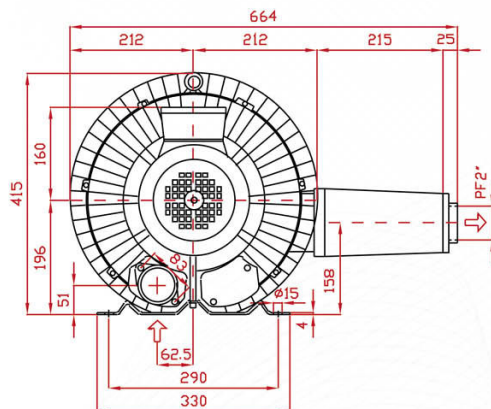

型號	功率	口徑	電壓	頻率	回轉數	靜壓	最大風量	噪音值	淨重	釋壓閥	過濾器
TYPE	KW	INCH	V	HZ	R.P.M.	mmAq	M <sup>3</sup> /MIN	dB(A)	KG(N.W.)	Relief Valve	Filter
BVH-7500	7.5/8.6	PF 2"	請指定電壓，註二 (Note 2)	50 60	2800 3300	5800 6750	5.2 6.2	75 79	80.5	BRV-2	MF16 / FS16
BVH-7500H	7.5/8.6	PF2-1/2"	請指定電壓，註二 (Note 2)	50 60	2800 3300	3500 2900	9.6 10.9	76 81	112	BRV-2	MF20

PS: 1. 訂購時請指定電壓與頻率。When ordering, please specify voltage and frequency.

2. 釋壓閥與過濾器為選購品，請參閱第86~87頁資料。The relief valve and filter are the option goods, please see page 86~87 data.

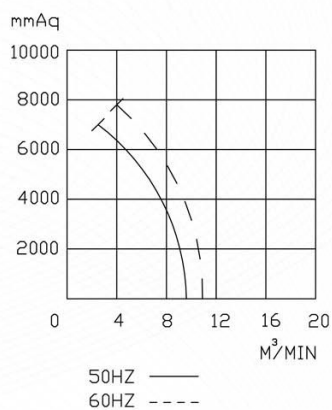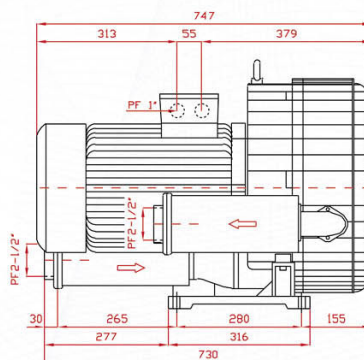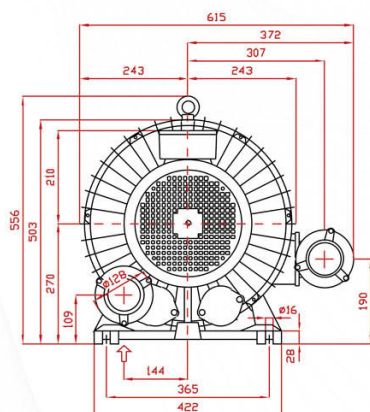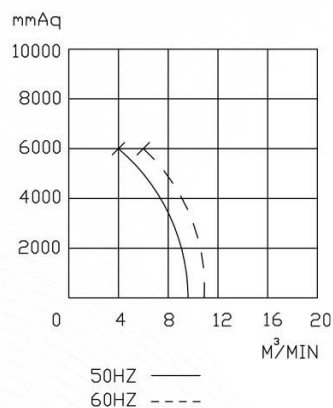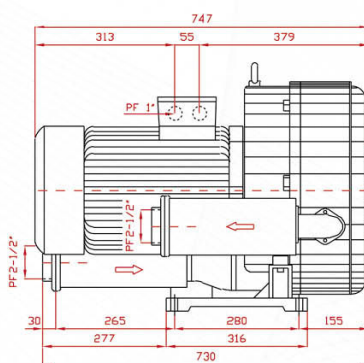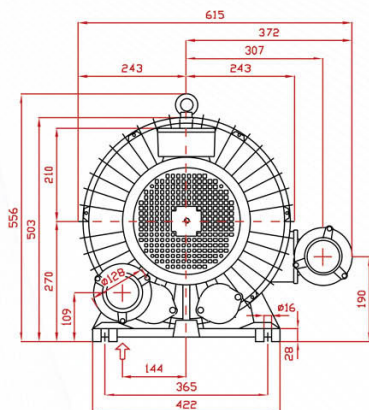

型號	功率	口徑	電壓	頻率	回轉數	靜壓	最大風量	噪音值	淨重	釋壓閥	過濾器
TYPE	KW	INCH	V	HZ	R.P.M.	mmAq	M <sup>3</sup> /MIN	dB(A)	KG(N.W.)	Relief Valve	Filter
BVH-15KW	13/15	PF2-1/2"	請指定電壓，註二 (Note 2)	50 60	2800 3300	6000 6000	9.6 10.9	76 81	142	BRV-2	MF20
BVH-22KW	20/22	PF2-1/2"	請指定電壓，註二 (Note 2)	50 60	2800 3300	7000 7800	9.6 10.9	76 81	160	BRV-2	MF20

2. 釋壓閥與過濾器為選購品，請參閱第86~87頁資料。The relief valve and filter are the option goods, please see page 86~87 data.